




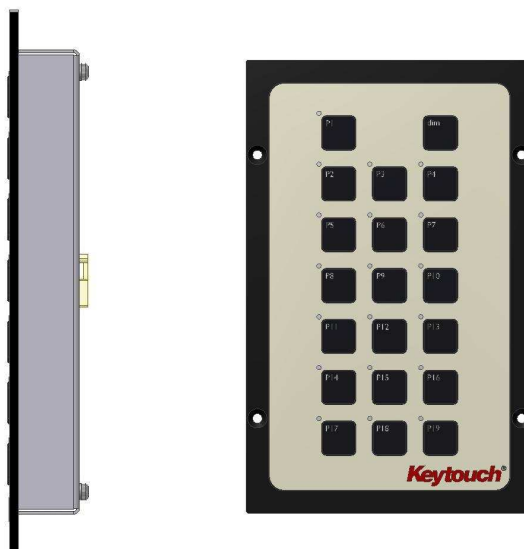
## Keytouch Multifunction Keypad

The Keytouch multifunction keypad has been developed to meet the specific needs and demands of the maritime market.

Designed for maximum flexibility, the keypad allows the user to adapt a standard keypad to meet individual color, logo and design requirements with very little additional development, time and cost.

It is suitable as a stand alone unit or can be utilized with other Keytouch units. Each key on the keypad can be individually labeled and can generate the user's required key codes. Sequenced key codes can also be generated on a single key. The Keytouch keypad is backlit and provides a distinct tactile feel.

Size (w*h)	124mm x 196mm Cutout: 114mmx186mm
Mounting	Drop-in module with mounting holes in frame, - optional back mounted and table box
Number of Keys	20 short travel switches
Number of indicators	19, dimmable
Key switch Lifetime	200.000 operations
Protection Level	IP22
Interface	USB, Windows compatible
OS	Windows compatible HID
Backlit	Yes, dimmable
Sensor	Light sensor for dimming of backlight and LEDs
Operation Temperature	-15°C~ 55°C
Storage Temperature	-20°C~ 60°C
Certificate	 IEC 60945 Certificate no: A-1225



**Keytouch AS**  
 Tverrmyra 7  
 Box 54, N-3195  
 Skoppum, Norway  
 Phone: +47 33035800  
 Fax: +47 33047244  
[info@keytouch.no](mailto:info@keytouch.no)  
[www.keytouch.no](http://www.keytouch.no)

**Keytouch USA, Inc.**  
 920 Greentree Drive  
 Winter Park, FL 32789  
 USA  
 Phone: +1 407 671 5500  
 Fax: +1 407 671 6606  
[info@keytouch.no](mailto:info@keytouch.no)  
[www.keytouch.no](http://www.keytouch.no)